

REV	DESCRIPTION	DATE	INT
A	CHANGED LOGO	2/14/14	INT

**SPECSHEET**

**PVB 5000**

Featherlite Collegiate Net System  
Deluxe 3-1/2" Height Adjustable  
Aluminum Volleyball Upright

THIS PRINT IS THE PROPERTY OF JAYPRO SPORTS, LLC  
AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

www.jaypro.com


**jaypro sports**

FAX: 860.444.1779 (SALES)  
860.440.0628 (ENG.)

JAYPRO SPORTS, LLC, 976 HARTFORD TURNPIKE, WATERFORD, CT 06385 USA

PHONE: 800.243.0533 (TOLL FREE)  
860.447.3001 (LOCAL)

DRAWING NAME/PART NUMBER: <b>PVB 5000</b>	CHECKED BY: MJE	ISSUE DATE: 3/18/2010
SHEET: 1 OF 2	REV: A	

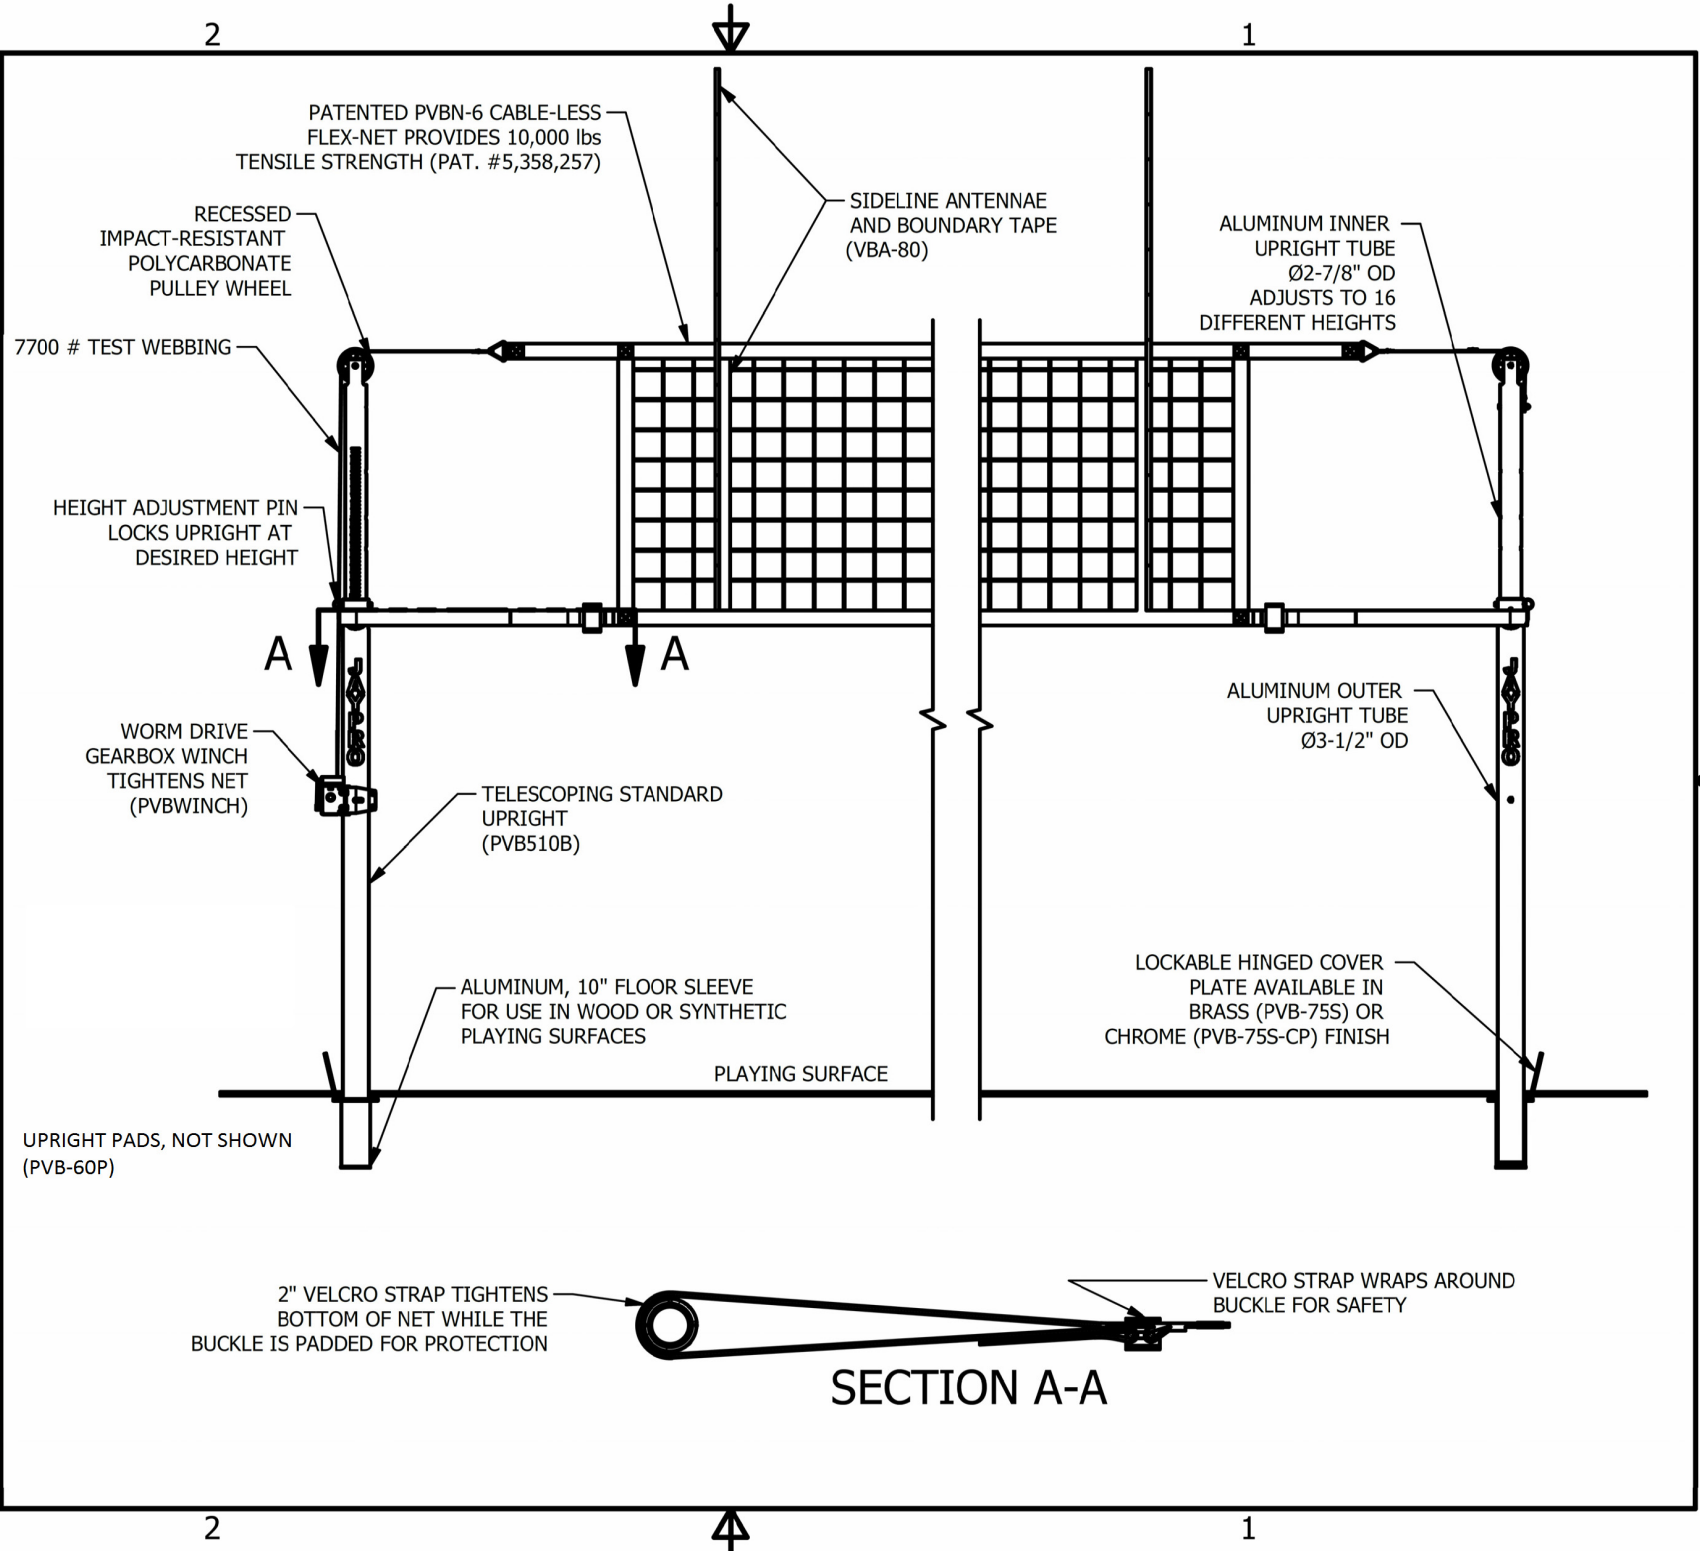

2" VELCRO STRAP TIGHTENS BOTTOM OF NET WHILE THE BUCKLE IS PADDED FOR PROTECTION

VELCRO STRAP WRAPS AROUND BUCKLE FOR SAFETY

**SECTION A-A**

# **JAYPRO MODEL PVB-5000**

## **“Featherlite Collegiate Net System”** **DELUXE 3-1/2” DIAMETER ALUMINUM HEIGHT ADJUSTABLE** **VOLLEYBALL SYSTEM**

System shall consist of two uprights and one winch and shall be supplied fully assembled. Uprights are intended to fit snugly into 3.575” ID x 10” deep rigid aluminum floor sleeves (model #: PVB-75S/PVB-75S-CP).

Two piece telescoping uprights shall provide 16 individual net height settings from 6’6” to 8’2” by means of an attached positive locking stop pin. No field assembly required upon receipt. Lower section of upright shall be constructed of 3-1/2” OD x 0.300” wall aluminum tube with a durable black finish. Upper section shall be constructed of 2-7/8” OD x 0.203” wall aluminum tube with 4” diameter pulley to accommodate the net tensioning straps. Anchor strap shall be adjustable and winch strap shall be long enough to readily adapt to varying sleeve installation widths.

Lower upright section shall have a molded composite foot to protect the finished floor during transportation, storage, and installation of standards.

Tensioning winch shall have an internal worm gear construction with an effective 10:1 turn ratio to eliminate snap-back and shall be completely enclosed with a welded steel cover. The winch shall be furnished with folding handle. Winch will have 1-1/2” wide high tensile strength (7700#) nylon strap with sewn snap buckle for complete cable-less design. Winch is located on outside of post for added player safety.

Standard pads: PVB-60P included w/ PVB-5000. Colors shall be available in any of fourteen (14) different colors (red, navy blue, yellow, light blue, grey, black, maroon, kelly green, forest green, royal blue, pink, tan, purple, orange). Color selection available per request.

**PVB-5000**